

Compact Fluorescent Lamps

Non-Integrated



The smart way to reduce costs

Extra energy saving up to 12% with WattMiser™ lamps compared to regular plug-in lamps

Up to 20,000 hours of extended service life with LongLast™ lamps

Wide range of colour and wattage (2700-6500K, 5-70W)

Dimmability for additional cost savings

Motion detection available with selected drivers

Extra low relamping cost with LongLast™ lamps



Office



Industrial



Biax™ D/T/Q/L LongLast™ for reduced relamping costs

GE Lighting's compact fluorescent LongLast™ lamps provide increased service life, which significantly reduces replacement and maintenance costs.


They are compact energy saving fluorescent lamps with double, triple and quad tube designs, providing an ideal light source for small fixtures and downlighters.

GE Biax™ T and Biax™ Q LongLast™ guarantees the same light output in any burning position. It can be used in both closed luminaires and outdoor applications without significant light loss due to GE Amalgam technology providing stable lumen performance within a wide colour temperature range.

LongLast™

- **Retrofit – can be used with existing fittings and control gears***
- **Reduces replacement and maintenance costs**
- **Further energy saving with dimming possibilities**
- **Available in warm to cool colour temperatures (2700 – 6500K)**

*Recommended control gear list available in the data sheets (www.gelighting.com/eu)

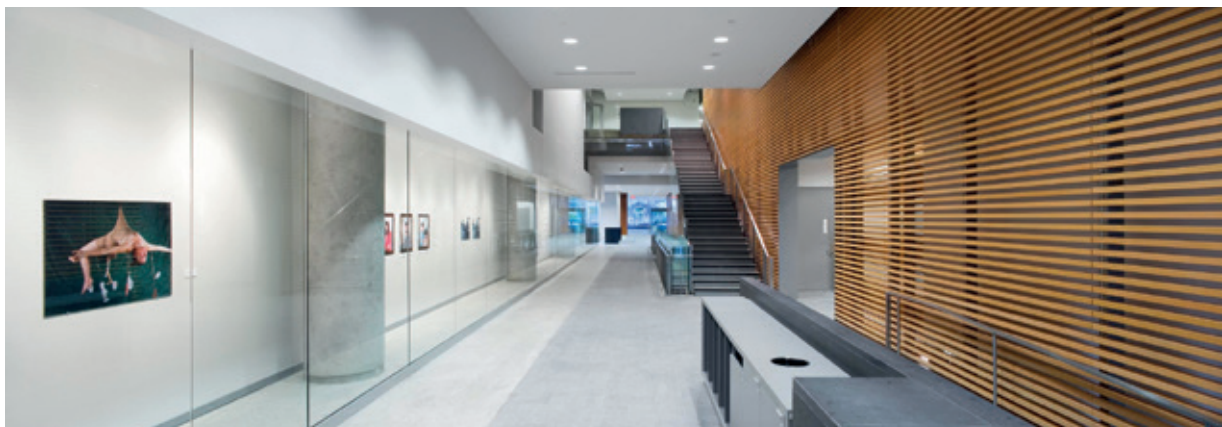

2D™ Watt-Miser™ *for reduced electricity bills*

GE 2D™ Watt-Miser™ lamps are energy saving compact fluorescent tubes formed into a '2D' shape. All types are available with a 4-pin cap, which allows the lamps to be used with conventional or electronic control gears, dimming and emergency lighting circuits.

The lamps offer additional energy savings, even when used with a standard control gear. GE 2D™ Watt-Miser™ lamps deliver market leading life performance and remarkable energy saving performance that is unique to GE Lighting.



2DWattMiser™

- Direct replacements for 16-21-28-38W standard 2D™ lamps
- Unique shape suitable for broad range of applications
- Interchangeable – can be used with existing fittings and control gear
- Very good for circular light distribution
- 5-12% extra energy saving compared to conventional plug-in lamps
- The only 'A' class energy 2D™ lamp on the market



Selector

Biax™ S



Biax™ S – 2pin

Cap: G23
Wattages: 5-7-9-11W
Colours: 2700 - 6500K
Rated life: 10,000Hrs



Biax™ S/E – 4pin

Cap: 2G7
Wattages: 5-7-9-11W
Colours: 2700 - 6500K
Rated life: 10,000Hrs
11W version available in Red/Green/Blue colours.

Biax™ D



Biax™ D – 2pin

Cap: G24d
Wattages: 10-13-18-26W
Colours: 2700 - 6500K
Rated life: 12,000Hrs

LongLast™



Biax™ D/E – 4pin

Cap: G24q
Wattage: 10-13-18-26W
Colours: 2700 - 6500K
Rated life: 20,000Hrs

LongLast™

Biax™ T



Biax™ T – 2pin

Cap: GX24d
Wattages: 13-18-26W
Colours: 2700 - 4000K
Rated life: 12,000Hrs

LongLast™



Biax™ T/E – 4pin

Cap: GX24q
Wattages: 13-18-26-32-42W
Colours: 2700 - 4000K
Rated life: 12,000 - 20,000Hrs

LongLast™

Biax™ Q



Biax™ Q/E – 4pin

Cap: GX24q
Wattages: 57-70W
Colours: 2700 - 4000K
Rated life: 20,000Hrs

LongLast™

Biax™ Q/E – Electronic Ballast

Volts: 220-240V
Wattages: 57-70W

Biax™ L



Biax™ L – 4pin

Cap: 2G11
Wattages: 18-55W
Colours: 2700 - 6500K
Rated life: 10,000 - 22,500Hrs

LongLast™

2D™



2D™

Cap: GR8, GR10q
Wattages: 16-38W
Colours: 2700 - 6000K
Rated life: 12,000-15,000Hrs

WattMiser™



Biax 2D™

Cap: GR10q, GR10q-3
Wattages: 10-55W
Colours: 2700 - 3500K
Rated life: 8,000 - 10,000Hrs



Biax™ 2D™ Integral

Cap: GR210d
Wattages: 18W
Colours: 2700 - 4000K
Rated life: 10,000Hrs

WattMiser™


*the 40-55W versions are LongLast types

Compact Fluorescent Lamps Non-Integrated

Product identification


The following glossary of terms will help you when selecting lamps in this section. Within each product line, lamps are divided into families – within these families, lamps are listed by wattage. The Product Description can be used as a quick reference to each product's attributes. Where Rated Life is stated we refer to the industry standard definition of how many hours of operation 50% of a given installation will exceed.

All Biax™ CFL lamps are manufactured with the high quality PolyLux triphosphor technology.

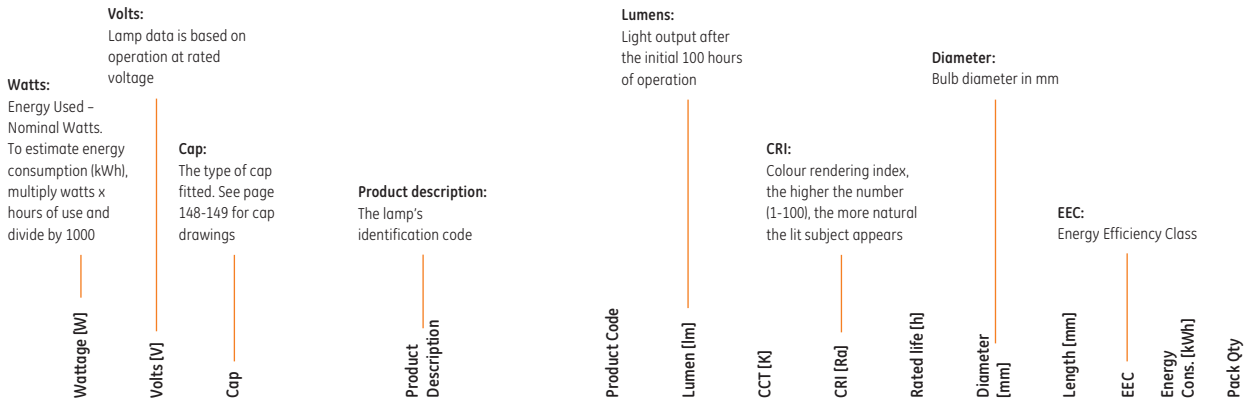

Biax™ S 2-pin, Internal Starter

Wattage [W]	Volts [V]	Cap	Product Description	Product Code	Lumen [lm]	CCT [K]	CRI [Ra]	Rated life [h]	Diameter [mm]	Length [mm]	EEC	Energy Cons. [kWh]	Pack Qty
5	35	G23	F5BX/SPX27/827	37654	265	2700	82	10,000	32	107.5	A	14,69	10
5	35	G23	F5BX/SPX41/840	37661	265	4000	82	10,000	32	107.5	A	14,69	10
7	47	G23	F7BX/SPX27/827	37846	425	2700	82	10,000	32	136.5	A	14,69	10

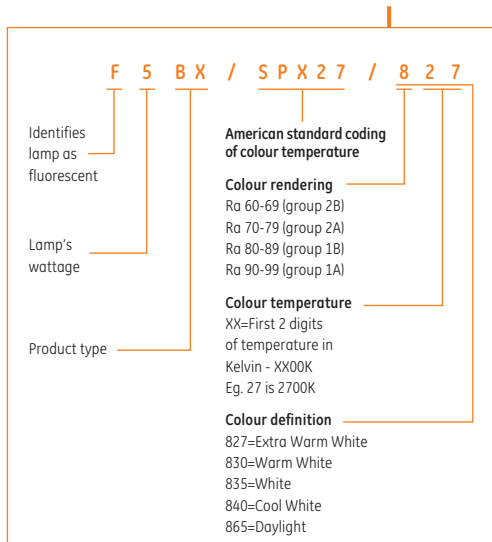

CCT: Colour temperature – Kelvin [K]. The visual warmth or coolness of the light. The higher the number the whiter or cooler the light appears

Product code: It is important to use this code when ordering to ensure that you receive the exact product you require

Rated Life: The point in time when 50% of installed lamps are still burning with 3h cycling. With HF gear used with 12h cycling.

Length: Total length including the length of the pin in mm

Energy Consumption: kWh/1000h

Pack quantity: Number of product units packed in a case

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CR (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	EEC	Energy Cons. (kWh)	Pack Qty
5	35	G23	F5BX/SPX27/827	37654	265	2700	82	10,000	32	107.5	B	7,15	10
5	35	G23	F5BX/SPX41/840	37661	265	4000	82	10,000	32	107.5	B	7,15	10
7	47	G23	F7BX/SPX27/827	37846	425	2700	82	10,000	32	136.5	A	9,18	10
7	47	G23	F7BX/830	38930	425	3000	82	10,000	32	136.5	A	9,18	10
7	47	G23	F7BX/SPX35/835	37659	425	3500	82	10,000	32	136.5	A	9,18	10
7	47	G23	F7BX/SPX41/840	37660	425	4000	82	10,000	32	136.5	A	9,18	10
7	47	G23	F7BX/865	38984	425	6500	82	10,000	32	136.5	A	9,18	10
9	60	G23	F9BX/827	37651	600	2700	82	10,000	32	167	A	11,05	10
9	60	G23	F9BX/830	38929	600	3000	82	10,000	32	167	A	11,05	10
9	60	G23	F9BX/SPX35/835	37652	600	3500	82	10,000	32	167	A	11,05	10
9	60	G23	F9BX/SPX41/840	37653	600	4000	82	10,000	32	167	A	11,05	10
9	60	G23	F9BX/865	38985	600	6500	82	10,000	32	167	A	11,05	10
11	91	G23	F11BX/827	37663	900	2700	82	10,000	32	237	A	14,69	10
11	91	G23	F11BX/830	38928	900	3000	82	10,000	32	237	A	14,69	10
11	91	G23	F11BX/835	37666	900	3500	82	10,000	32	237	A	14,69	10
11	91	G23	F11BX/840	37664	900	4000	82	10,000	32	237	A	14,69	10
11	91	G23	F11BX/865	38986	900	6500	82	10,000	32	237	A	14,69	10



Biac™ S/E 4-pin, External Starter Required

5	35	2G7	F5BX/827/4P	37714	265	2700	82	15,000***	37.5	92	A	5,50	10
5	35	2G7	F5BX/840/4P	37715	265	4000	82	15,000***	37.5	92	A	5,50	10
7	47	2G7	F7BX/827/4P	37658	425	2700	82	15,000***	37.5	121	A	7,15	10
7	47	2G7	F7BX/840/4P	37716	425	4000	82	15,000***	37.5	121	A	7,15	10
9	60	2G7	F9BX/827/4P	37710	600	2700	82	15,000***	37.5	151	A+	8,80	10
9	60	2G7	F9BX/830/4P	97926	600	3000	82	15,000***	37.5	151	A+	8,80	10
9	60	2G7	F9BX/840/4P	37711	600	4000	82	15,000***	37.5	151	A+	8,80	10
11	91	2G7	F11BX/827/4P	37717	900	2700	82	15,000***	37.5	222	A+	12,10	10
11	91	2G7	F11BX/830/4P	97925	900	3000	82	15,000***	37.5	222	A+	12,10	10
11	91	2G7	F11BX/840/4P	37713	900	4000	82	15,000***	37.5	222	A+	12,10	10
11	91	2G7	F11BX/865/4P	12603	900	6500	82	15,000***	37.5	222	A+	12,10	10
11	91	2G7	F11BX/GREEN/2G7	98311	1200	GREEN	N/A	15,000***	37.5	222	N/A	N/A	10
11	91	2G7	F11BX/BLUE/2G7	98313	250	BLUE	N/A	15,000***	37.5	222	N/A	N/A	10
11	91	2G7	F11BX/RED/2G7	98314	600	RED	N/A	15,000***	37.5	222	N/A	N/A	10



Biac™ D 2-pin, Internal Starter

10	64	G24D-1	F10DBX/T4/827/2P	70248	600	2700	82	12,000	34,4	108,5	B	12,70	10
10	64	G24D-1	F10DBX/T4/830/2P	70258	600	3000	82	12,000	34,4	108,5	B	12,70	10
10	64	G24D-1	F10DBX/T4/840/2P	70265	600	4000	82	12,000	34,4	108,5	B	12,70	10
10	64	G24D-1	F10DBX/T4/865/2P	70268	600	6500	82	12,000	34,4	108,5	B	12,70	10
10	64	G24D-1	F10DBX/T3/827/2P	78211*	600	2700	82	12,000	34,4	108	B	12,70	10
10	64	G24D-1	F10DBX/T3/830/2P	78212*	600	3000	82	12,000	34,4	108	B	12,70	10
10	64	G24D-1	F10DBX/T3/835/2P	78213**	600	3500	82	12,000	34,4	108	B	12,70	10
10	64	G24D-1	F10DBX/T3/840/2P	78214*	600	4000	82	12,000	34,4	108	B	12,70	10
10	64	G24D-1	F10DBX/T3/865/2P	78215*	600	6500	82	12,000	34,4	108	B	12,70	10
13	91	G24D-1	F13DBX/T4/827/2P	70561	900	2700	82	12,000	34,4	133	A	16,18	10
13	91	G24D-1	F13DBX/T4/830/2P	70572	900	3000	82	12,000	34,4	133	A	16,18	10
13	91	G24D-1	F13DBX/T4/840/2P	70573	900	4000	82	12,000	34,4	133	A	16,18	10
13	91	G24D-1	F13DBX/T4/865/2P	70574	900	6500	82	12,000	34,4	133	A	16,18	10
13	91	G24D-1	F13DBX/T3/827/2P	78221*	900	2700	82	12,000	34,4	139	A	16,18	10
13	91	G24D-1	F13DBX/T3/830/2P	78222*	900	3000	82	12,000	34,4	139	A	16,18	10
13	91	G24D-1	F13DBX/T3/835/2P	78223**	900	3500	82	12,000	34,4	139	A	16,18	10
13	91	G24D-1	F13DBX/T3/840/2P	78224*	900	4000	82	12,000	34,4	139	A	16,18	10
13	91	G24D-1	F13DBX/T3/865/2P	78225*	900	6500	82	12,000	34,4	139	A	16,18	10



* will be delisted, change from T3 to T4
 ** will be delisted with no direct substitute
 *** life on electronic gear 12h-cycle

Compact Fluorescent Lamps Non-Integrated



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	EEC	Energy Cons. (kWh)	Pack Qty
Biax™ D 2-pin, Internal Starter													
18	100	G24d-2	F18DBX/T4/SPX27/827	12860	1200	2700	82	12,000	34.4	154	B	22.10	10
18	100	G24d-2	F18DBX/T4/SPX30/830	12861	1200	3000	82	12,000	34.4	154	B	22.10	10
18	100	G24d-2	F18DBX/T4/SPX35/835	12863	1200	3500	82	12,000	34.4	154	B	22.10	10
18	100	G24d-2	F18DBX/T4/SPX41/840	12864	1200	4000	82	12,000	34.4	154	B	22.10	10
18	100	G24d-2	F18DBX/T4/SPX65/865	13017	1200	6500	82	12,000	34.4	154	B	22.10	10
26	105	G24d-3	F26DBX/T4/SPX27/827	35250	1800	2700	82	12,000	34.4	169.5	B	31.35	10
26	105	G24d-3	F26DBX/T4/SPX30/830	35237	1800	3000	82	12,000	34.4	169.5	B	31.35	10
26	105	G24d-3	F26DBX/T4/SPX35/835	35251	1800	3500	82	12,000	34.4	169.5	B	31.35	10
26	105	G24d-3	F26DBX/T4/SPX41/840	35252	1800	4000	82	12,000	34.4	169.5	B	31.35	10
26	105	G24d-3	F26DBX/T4/SPX65/865	35305	1710	6500	82	12,000	34.4	169.5	B	31.42	10



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	EEC	Energy Cons. (kWh)	Pack Qty
Biax™ D/E LongLast™ 4-pin, External Starter Required													
10	64	G24q-1	F10DBX/T4/827/4P	70553	600	2700	82	20,000***	34.4	101	A	10.45	10
10	64	G24q-1	F10DBX/T4/830/4P	70555	600	3000	82	20,000***	34.4	101	A	10.45	10
10	64	G24q-1	F10DBX/T4/840/4P	70560	600	4000	82	20,000***	34.4	101	A	10.45	10
10	64	G24q-1	F10DBX/T3/827/4P	78217*	600	2700	82	20,000***	34.4	100.5	A	10.45	10
10	64	G24q-1	F10DBX/T3/830/4P	78218*	600	3000	82	20,000***	34.4	100.5	A	10.45	10
10	64	G24q-1	F10DBX/T3/835/4P	78219**	600	3500	82	20,000***	34.4	100.5	A	10.45	10
10	64	G24q-1	F10DBX/T3/840/4P	78220	600	4000	82	20,000***	34.4	100.5	A	10.45	10
10	64	G24q-1	F10DBX/T3/865/4P	78231**	600	6500	82	20,000***	34.4	100.5	A	10.45	10
13	91	G24q-1	F13DBX/T4/827/4P	70580	900	2700	82	20,000***	34.4	125.5	A	13.75	10
13	91	G24q-1	F13DBX/T4/830/4P	70583	900	3000	82	20,000***	34.4	125.5	A	13.75	10
13	91	G24q-1	F13DBX/T4/840/4P	70584	900	4000	82	20,000***	34.4	125.5	A	13.75	10
13	91	G24q-1	F13DBX/T4/865/4P	70587	900	6500	82	20,000***	34.4	125.5	A	13.75	10
13	91	G24q-1	F13DBX/T3/827/4P	78226*	900	2700	82	20,000***	34.4	131.5	A	13.75	10
13	91	G24q-1	F13DBX/T3/830/4P	78227*	900	3000	82	20,000***	34.4	131.5	A	13.75	10
13	91	G24q-1	F13DBX/T3/835/4P	78228**	900	3500	82	20,000***	34.4	131.5	A	13.75	10
13	91	G24q-1	F13DBX/T3/840/4P	78229*	900	4000	82	20,000***	34.4	131.5	A	13.75	10
13	91	G24q-1	F13DBX/T3/865/4P	78232*	900	6500	82	20,000***	34.4	131.5	A	13.75	10
18	100	G24q-2	F18DBX/SPX27/827/4P	12865	1200	2700	82	20,000***	34.4	146.5	A	18.15	10
18	100	G24q-2	F18DBX/SPX30/830/4P	12866	1200	3000	82	20,000***	34.4	146.5	A	18.15	10
18	100	G24q-2	F18DBX/SPX35/835/4P	12869	1200	3500	82	20,000***	34.4	146.5	A	18.15	10
18	100	G24q-2	F18DBX/SPX41/840/4P	12870	1200	4000	82	20,000***	34.4	146.5	A	18.15	10
26	105	G24q-3	F26DBX/SPX27/827/4P	35247	1800	2700	82	20,000***	34.4	162	A	26.40	10
26	105	G24q-3	F26DBX/SPX30/830/4P	35235	1800	3000	82	20,000***	34.4	162	A	26.40	10
26	105	G24q-3	F26DBX/SPX35/835/4P	35248	1800	3500	82	20,000***	34.4	162	A	26.40	10
26	105	G24q-3	F26DBX/SPX41/840/4P	35236	1800	4000	82	20,000***	34.4	162	A	26.40	10
26	105	G24q-3	F26DBX/SPX65/865/4P	42798	1710	6500	82	20,000***	34.4	162	A	26.40	10



Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	EEC	Energy Cons. (kWh)	Pack Qty
Biax™ T 2-pin with Amalgam, Internal Starter													
13	91	GX24d-1	F13TBX/827/A/2P	35940	900	2700	82	12,000	49.3	112.9	B	16.18	10
13	91	GX24d-1	F13TBX/SPX30/830/A/2P	35966	900	3000	82	12,000	49.3	112.9	B	16.18	10
13	91	GX24d-1	F13TBX/SPX41/A/2P	35941	900	4000	82	12,000	49.3	112.9	B	16.18	10
18	100	GX24d-2	F18TBX/SPX27/827/A/2P	35945	1200	2700	82	12,000	49.3	127.4	B	22.10	10
18	100	GX24d-2	F18TBX/SPX30/830/A/2P	35944	1200	3000	82	12,000	49.3	127.4	B	22.10	10
18	100	GX24d-2	F18TBX/SPX41/840/A/2P	35939	1200	4000	82	12,000	49.3	127.4	B	22.10	10
26	105	GX24d-3	F26TBX/SPX27/827/A/2P	35959	1800	2700	82	12,000	49.3	139.9	B	32.79	10
26	105	GX24d-3	F26TBX/SPX30/830/A/2P	35952	1800	3000	82	12,000	49.3	139.9	B	32.79	10
26	105	GX24d-3	F26TBX/SPX41/840/A/2P	35964	1800	4000	82	12,000	49.3	139.9	B	32.79	10

* will be delisted, change from T3 to T4
 ** will be delisted with no direct substitute
 *** life on electronic gear 12h-cycle

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	EEC	Energy Cons. (kWh)	Pack Qty
Biax™ T/E LongLast™ 4-pin with Amalgam, External Starter Required													
13	91	GX24q-1	F13TBX/SPX27/827/A/4P	34391	900	2700	82	20,000**	49.3	106.2	A	13,75	10
13	91	GX24q-1	F13TBX/SPX30/830/A/4P	34395	900	3000	82	20,000**	49.3	106.2	A	13,75	10
13	91	GX24q-1	F13TBX/SPX35/835/A/4P	34400	900	3500	82	20,000**	49.3	106.2	A	13,75	10
13	91	GX24q-1	F13TBX/SPX41/840/A/4P	34387	900	4000	82	20,000**	49.3	106.2	A	13,75	10
18	100	GX24q-2	F18TBX/SPX27/827/A/4P	34392	1200	2700	82	20,000**	49.3	120.7	A	18,15	10
18	100	GX24q-2	F18TBX/SPX30/830/A/4P	34396	1200	3000	82	20,000**	49.3	120.7	A	18,15	10
18	100	GX24q-2	F18TBX/SPX35/835/A/4P	34405	1200	3500	82	20,000**	49.3	120.7	A	18,15	10
18	100	GX24q-2	F18TBX/SPX41/840/A/4P	34385	1200	4000	82	20,000**	49.3	120.7	A	18,15	10
26	105	GX24q-3	F26TBX/SPX27/827/A/4P	34393	1800	2700	82	20,000**	49.3	133.2	A	26,40	10
26	105	GX24q-3	F26TBX/SPX30/830/A/4P	34397	1800	3000	82	20,000**	49.3	133.2	A	26,40	10
26	105	GX24q-3	F26TBX/SPX35/835/A/4P	34406	1800	3500	82	20,000**	49.3	133.2	A	26,40	10
26	105	GX24q-3	F26TBX/SPX41/840/A/4P	34381	1800	4000	82	20,000**	49.3	133.2	A	26,40	10

Biax™ T/E LongLast™ 4-pin with Amalgam, External Starter Required with HF gear*													
32	100	GX24q-3	F32TBX/SPX27/827/AP4P	94520	2400	2700	82	20,000**	49.3	146.2	A	35,20	10
32	100	GX24q-3	F32TBX/SPX30/830/AP4P	94521	2400	3000	82	20,000**	49.3	146.2	A	35,20	10
32	100	GX24q-3	F32TBX/SPX35/835/A/4P	94522	2400	3500	82	20,000**	49.3	146.2	A	35,20	10
32	100	GX24q-3	F32TBX/SPX41/840/A/4P	94523	2400	4000	82	20,000**	49.3	146.2	A	35,20	10
42	135	GX24q-4	F42TBX/827/A/4P	46312	3200	2700	82	20,000**	49.3	163.2	A	47,30	10
42	135	GX24q-4	F42TBX/830/A/4P	46313	3200	3000	82	20,000**	49.3	163.2	A	47,30	10
42	135	GX24q-4	F42TBX/835/A/4P	46314	3200	3500	82	20,000**	49.3	163.2	A	47,30	10
42	135	GX24q-4	F42TBX/841/A/4P	46315	3200	4000	82	20,000**	49.3	163.2	A	47,30	10

Biax™ Q/E LongLast™ 4-pin with Amalgam, External Starter Required with HF gear*													
57	175	GX24q-5	F57QBX/827/A/4P/LL	45213	4300	2700	82	20,000**	58.3	180.7	A	61,60	10
57	175	GX24q-5	F57QBX/830/A/4P/LL	45204	4300	3000	82	20,000**	58.3	180.7	A	61,60	10
57	175	GX24q-5	F57QBX/835/A/4P/LL	45202	4300	3500	82	20,000**	58.3	180.7	A	61,60	10
57	175	GX24q-5	F57QBX/840/A/4P/LL	45201	4300	4000	82	20,000**	58.3	180.7	A	61,60	10
70	219	GX24q-6	F70QBX/830/A/4P/LL	45208	5200	3000	82	20,000**	58.3	208.2	A	77,00	10
70	219	GX24q-6	F70QBX/835/A/4P/LL	45219	5200	3500	82	20,000**	58.3	208.2	A	77,00	10
70	219	GX24q-6	F70QBX/840/A/4P/LL	45218	5200	4000	82	20,000**	58.3	208.2	A	77,00	10

Biax™L LongLast™4-pin, External Starter Required with HF gear*													
40	126	2G11	F40BX/830	41171	3500	3000	82	22,500	43.8	538.8	A	44,00	25
40	126	2G11	F40BX/835	41172	3500	3500	82	22,500	43.8	538.8	A	44,00	25
40	126	2G11	F40BX/840	41173	3500	4000	82	22,500	43.8	538.8	A	44,00	25
55	101	2G11	F55BX/830	41174	4800	3000	82	22,500	43.8	538.8	A	60,50	25
55	101	2G11	F55BX/835	41260	4800	3500	82	22,500	43.8	538.8	A	60,50	25
55	101	2G11	F55BX/840	41298	4800	4000	82	22,500	43.8	538.8	A	60,50	25
55	101	2G11	F55BX/865	75695	4550	6500	82	22,500	43.8	538.8	A	60,50	25

*Life test: If HF gear used with 12h cycling, otherwise with 3h cycling.

**life on electronic gear 12h-cycle

Compact Fluorescent Lamps Non-Integrated

Wattage (W)	Volts (V)	Cap	Product Description	Product Code	Lumen (lm)	CCT (K)	CRI (Ra)	Rated life (h)	Diameter (mm)	Length (mm)	EEC	Energy Cons. (kWh)	Pack Qty
Biax™ L 4-pin, External Starter Required													
18	58	2G11	F18BX/827	41087	1250	2700	82	15,000***	43.8	231.3	A	17,60	25
18	58	2G11	F18BX/830	41088	1250	3000	82	15,000***	43.8	231.3	A	17,60	25
18	58	2G11	F18BX/835	41089	1250	3500	82	15,000***	43.8	231.3	A	17,60	25
18	58	2G11	F18BX/840	41090	1250	4000	82	15,000***	43.8	231.3	A	17,60	25
24	87	2G11	F24BX/827	41128	1800	2700	82	15,000***	43.8	326.8	A	24,20	25
24	87	2G11	F24BX/830	41134	1800	3000	82	15,000***	43.8	326.8	A	24,20	25
24	87	2G11	F24BX/835	41145	1800	3500	82	15,000***	43.8	326.8	A	24,20	25
24	87	2G11	F24BX/840	41155	1800	4000	82	15,000***	43.8	326.8	A	24,20	25
34	120	2G11	F34BX/830	41163	2800	3000	82	15,000***	43.8	538.8	A+	33,00	25
34	120	2G11	F34BX/835	41166	2800	3500	82	15,000***	43.8	538.8	A+	33,00	25
34	120	2G11	F34BX/840	41167	2800	4000	82	15,000***	43.8	538.8	A+	33,00	25
36	106	2G11	F36BX/827	41307	2900	2700	82	15,000***	43.8	421.8	A+	36,52	25
36	106	2G11	F36BX/830	41168	2900	3000	82	15,000***	43.8	421.8	A+	36,52	25
36	106	2G11	F36BX/835	41169	2900	3500	82	15,000***	43.8	421.8	A+	36,52	25
36	106	2G11	F36BX/840	41170	2900	4000	82	15,000***	43.8	421.8	A+	36,52	25
36	106	2G11	F36BX/865	75694	2750	6500	82	15,000***	43.8	421.8	A	36,52	25



2D™ Watt-Miser™

16	103	GR8	F162D/827	41744*	1100	2700	82	12,000	138	142	A	18,74	20
16	103	GR8	F162D/835	41745*	1100	3500	82	12,000	138	142	A	18,74	20
16	103	GR10q	F162D/827/4P	41746*	1100	2700	82	12,000	138	142	A	15,40	20
16	103	GR10q	F162D/830/4P	75066**	1100	3000	82	12,000	138	142	A	15,40	20
16	103	GR10q	F162D/835/4P	41747*	1100	3500	82	12,000	138	142	A	15,40	20
16	103	GR8	F162D/860	41749*	1050	6000	82	12,000	138	142	A	18,78	20
16	103	GR8	F162D/T4/827/2P GE HB 1/10 WM	85135	1100	2700	82	12,000	138	142	A	18,74	10
16	103	GR8	F162D/T4/835/2P GE HB 1/10 WM	85138	1100	3500	82	12,000	138	142	A	18,74	10
16	103	GR10q	F162D/T4/827/4P GE HB 1/10 WM	85141	1100	2700	82	12,000	138	142	A	15,40	10
16	103	GR10q	F162D/T4/835/4P GE HB 1/10 WM	85142	1100	3500	82	12,000	138	142	A	15,40	10
16	103	GR8	F162D/T4/860/2P GE HB 1/10 WM	85140	1050	6000	82	12,000	138	142	A	18,78	10
21	103	GR10q	F212D/827/4P	41794*	1375	2700	82	12,000	138	142	A	20,90	20
21	103	GR10q	F212D/835/4P	41806*	1375	3500	82	12,000	138	142	A	20,90	20
21	103	GR10q	F212D/860/4P	41808*	1305	6000	82	12,000	138	142	A	20,90	20
21	103	GR10q	F212D/T4/827/4P GE HB 1/10 WM	85143	1375	2700	82	12,000	138	142	A	20,9	10
21	103	GR10q	F212D/T4/835/4P GE HB 1/10 WM	85144	1375	3500	82	12,000	138	142	A	20,9	10
21	103	GR10q	F212D/T4/860/4P GE HB 1/10 WM	85145	1305	6000	82	12,000	138	142	A	20,9	10
28	108	GR8	F282DT5/827/2P	10546*	2150	2700	82	15,000	202	204	A	31,71	20
28	108	GR10q	F282DT5/827/4P	10547*	2150	2700	82	15,000	202	204	A	26,95	20
28	108	GR10q	F282DT5/830/4P	75068*	2150	3000	82	15,000	202	204	A	26,95	20
28	108	GR10q	F282DT5/835/4P	10567*	2150	3500	82	15,000	202	204	A	26,95	20
28	108	GR10q	F282DT5/840/4P	10548*	2150	4000	82	15,000	202	204	A	26,95	20
28	108	GR8	F282D/T5/827/2P GE HB 1/10 WM	85109	2150	2700	82	15,000	202	204	A	31,71	20
28	108	GR10q	F282D/T5/827/4P GE HB 1/10 WM	85118	2150	2700	82	15,000	202	204	A	26,95	20
28	108	GR10q	F282D/T5/830/4P GE HB1/10 WM	85120	2150	3000	82	15,000	202	204	A	26,95	20
28	108	GR10q	F282D/T5/835/4P GE HB 1/10 WM	85130	2150	3500	82	15,000	202	204	A	26,95	20
28	108	GR10q	F282D/T5/840/4P GE HB 1/10 WM	85132	2150	4000	82	15,000	202	204	A	26,95	20



* will be delisted, pack change from blister to hanging box

** will be delisted with no direct substitute

***life on electronic gear 12k-cycle



Wattage [W]	Volts [V]	Cap	Product Description	Product Code	Lumen [lm]	CCT [K]	CRI [Ra]	Rated life [h]	Diameter [mm]	Length [mm]	EEC	Energy Cons. [kWh]	Pack Qty
2D™ Watt-Miser™													
38	110	GR10q	F382DT5/827/4P	10550*	3020	2700	82	15000	202	204	A	37,95	20
38	110	GR10q	F382DT5/830/4P	75067**	3020	3000	82	15000	202	204	A	37,95	20
38	110	GR10q	F382DT5/835/4P	10566*	3020	3500	82	15000	202	204	A	37,95	20
38	110	GR10q	F382D/T5/827/4P GE HB 1/10 WM	85133	3020	2700	82	15,000	202	204	A	37,95	10
38	110	GR10q	F382D/T5/835/4P GE HB 1/10 WM	85134	3020	3500	82	15,000	202	204	A	37,95	10
38	110	GR10q	F382D/T5/860/4P LEG HB 1/10 WM	85151	2860	6000	82	15,000	202	204	A	37,95	10
55	98	GR10q3	F552D/T5/827/4P A LEG HB 1/10	85148	3900	2700	82	10,000	202	204	A	61,6	10
55	98	GR10q3	F552D/T5/830/4P A/T LEG HB 1/10	85149	3900	3000	82	10,000	202	204	A	61,6	10
55	98	GR10q3	F552D/T5/835/4P A LEG HB 1/10	85150	3900	3500	82	10,000	202	204	A	61,6	10


Biax™ 2D™

10	60	GR10q	F10W/2D/827/4P	88105	650	2700	82	8,000	92	95	A	10,45	20
10	60	GR10q	F10W/2D/835/4P	88106	650	3500	82	8,000	92	95	A	10,45	20
55	98	GR10q-3	F552D/T5/827/A/4P	78337*	3900	2700	82	10,000	202	204	A	61,60	20
55	98	GR10q-3	F552D/T5/830/4P	78339*	3900	3000	82	10,000	202	204	A	61,60	20
55	98	GR10q-3	F552D/T5/835/A/4P	78340*	3900	3500	82	10,000	202	204	A	61,60	20



Biax™ 2D™ Watt-Miser™ with Integral Control Gear

18	220-240	GRZ10d	FLE18W2D/827 GRZ10D	18122***	1200	2700	82	10,000	138	142	A	16,00	10
18	220-240	GRZ10d	FLE18W2D/835 GRZ10D	18123***	1200	3500	82	10,000	138	142	A	16,00	10
18	220-240	GRZ10d	FLE18W2D/840 GRZ10D	18120***	1200	4000	82	10,000	138	142	A	16,00	10



Wattage [W]	Volts [V]	Product Description	Product Code	Diameter [mm]	Length [mm]	Pack Qty
-------------	-----------	---------------------	--------------	---------------	-------------	----------

Biax™ Q/E Electronic Ballast

57-70	220-240	BLS/E/1X57-70W/QBX220-240V	13248	79	123	12
-------	---------	----------------------------	-------	----	-----	----

* will be delisted, pack change from blister to hanging box

** will be delisted with no direct substitute

*** will be delisted in 2015 no substitute

Compact Fluorescent Lamps Non-Integrated

The following pages show GE and alternative brand Order Codes. These cross references are provided as a quick guide and may only represent a near equivalent to other brands. The table contains data from alternative brands' catalogues and website.

GE			OSRAM	PHILIPS	Havells Sylvania
	Biax™S 2pin	Colour temperature	Dulux S	Master PL-S 2	Lynx-S
5W	F5BX/827	2700	DULUX S 5W/827	PL-S 5W/827/2P	Lynx S 5W/827
	F5BX/840	4000	DULUX S 5W/840	-	Lynx S 5W/840
7W	F7BX/827	2700	DULUX S 7W/827	PL-S 7W/827/2P	Lynx S 7W/827
	F7BX/830	3000	DULUX S 7W/830	-	Lynx S 7W/830
	F7BX/835	3500	DULUX S 7W/835	-	-
	F7BX/840	4000	DULUX S 7W/840	PL-S 7W/840/2P	Lynx S 7W/840
	F7BX/865	6500	DULUX S 7W/865	-	-
9W	F9BX/827	2700	DULUX S 9W/827	PL-S 9W/827/2P	Lynx S 9W/827
	F9BX/830	3000	DULUX S 9W/830	PL-S 9W/830/2P	Lynx S 9W/830
	F9BX/835	3500	DULUX S 9W/835	-	-
	F9BX/840	4000	DULUX S 9W/840	PL-S 9W/840/2P	Lynx S 9W/840
	F9BX/865	6500	DULUX S 9W/865	-	-
11W	F11BX/827	2700	DULUX S 11W/827	PL-S 11W/827/2P	Lynx S 11W/827
	F11BX/830	3000	DULUX S 11W/830	-	Lynx S 11W/830
	F11BX/835	3500	-	-	-
	F11BX/840	4000	DULUX S 11W/840	PL-S 11W/840/2P	Lynx S 11W/840
	F11BX/865	6500	DULUX S 11W/865	-	-
	-	-	DULUX S 9W/Red	-	-
	-	-	DULUX S 9W/Green	-	-
	-	-	DULUX S 9W/Blue	-	-
	Biax™S/E 4pin		Dulux-SE	Master PL-S 4	Lynx - SE
5W	F5BX/827/4P	2700	-	PL-S 5W/827/4P	Lynx SE 5W/827
	F5BX/840/4P	4000	-	PL-S 5W/840/4P	Lynx SE 5W/840
7W	F7BX/827/4P	2700	DULUX S/E 7W/827	PL-S 7W/827/4P	Lynx SE 7W/827
	F7BX/840/4P	4000	DULUX S/E 7W/840	PL-S 7W/840/4P	Lynx SE 7W/840
9W	F9BX/827/4P	2700	DULUX S/E 9W/827	PL-S 9W/827/4P	Lynx SE 9W/827
	F9BX/830/4P	3000	DULUX S/E 9W/830	-	Lynx SE 9W/830
	F9BX/840/4P	4000	DULUX S/E 9W/840	PL-S 9W/840/4P	Lynx SE 9W/840
11W	F11BX/827/4P	2700	DULUX S/E 11W/827	PL-S 11W/827/4P	Lynx SE 11W/827
	F11BX/827/4P	3000	DULUX S/E 11W/830	-	Lynx SE 11W/830
	F11BX/840/4P	4000	DULUX S/E 11W/840	PL-S 11W/840/4P	Lynx SE 11W/840
	F11BX/865/4P	6500	-	-	-
	F11BX/Red	-	-	-	-
	F11BX/Green	-	-	-	-
	F11BX/Blue	-	-	-	-
	Biax™D 2pin		Dulux-D	Master PL-C	Lynx-D
10W	F10DBX/827	2700	DULUX D 10W/827	PL-C 10W/827/2P	Lynx D 10W/827
	F10DBX/830	3000	DULUX D 10W/830	PL-C 10W/830/2P	Lynx D 10W/830
	F10DBX/840	4000	DULUX D 10W/840	PL-C 10W/840/2P	Lynx D 10W/840
	F10DBX/865	6500	DULUX D 10W/865	-	Lynx D 10W/860
13W	F13DBX/827	2700	DULUX D 13W/827	PL-C 13W/827/2P	Lynx D 13W/827
	F13DBX/830	3000	DULUX D 13W/830	PL-C 13W/830/2P	Lynx D 13W/830
	F13DBX/840	4000	DULUX D 13W/840	PL-C 13W/840/2P	Lynx D 13W/840
	F13DBX/865	6500	DULUX D 13W/865	-	Lynx D 13W/860
18W	F18DBX/827	2700	DULUX D 18W/827	PL-C 18W/827/2P	Lynx D 18W/827
	F18DBX/830	3000	DULUX D 18W/830	PL-C 18W/830/2P	Lynx D 18W/830
	F18DBX/835	3500	DULUX D 18W/835	-	Lynx D 18W/835
	F18DBX/840	4000	DULUX D 18W/840	PL-C 18W/840/2P	Lynx D 18W/840
	F18DBX/865	6500	DULUX D 18W/865	-	Lynx D 18W/860
26W	F26DBX/827	2700	DULUX D 26W/827	PL-C 26W/827/2P	Lynx D 26W/827
	F26DBX/830	3000	DULUX D 26W/830	PL-C 26W/830/2P	Lynx D 26W/830
	F26DBX/835	3500	DULUX D 26W/835	PL-C 26W/835/2P	Lynx D 26W/835

Brand cross reference

GE			OSRAM	PHILIPS	Havells Sylvania
	Biax™D/E 4pin	Colour temperature	Dulux-DE	Master PL-C	Lynx-DE
10W	F10DBX/827/4P/EOL	2700	DULUX D/E 10W/827	PL-C 10W/827/4P	Lynx DE 10W/827
	F10DBX/830/4P/EOL	3000	DULUX D/E 10W/830	PL-C 10W/830/4P	Lynx DE 10W/830
	F10DBX/840/4P/EOL	4000	DULUX D/E 10W/840	PL-C 10W/840/4P	Lynx DE 10W/840
13W	F13DBX/827/4P/EOL	2700	DULUX D/E 13W/827	PL-C 13W/827/4P	Lynx DE 13W/827
	F13DBX/830/4P/EOL	3000	DULUX D/E 13W/830	PL-C 13W/830/4P	Lynx DE 13W/830
	F13DBX/840/4P/EOL	4000	-	PL-C 13W/840/4P	Lynx DE 13W/840
	F13DBX/865/4P/EOL	6500	-	-	Lynx DE 13W/860
18W	F18DBX/827/4P/EOL	2700	DULUX D/E 18W/827	PL-C 18W/827/4P	Lynx DE 18W/827
	F18DBX/830/4P/EOL	3000	DULUX D/E 18W/830	PL-C 18W/830/4P	Lynx DE 18W/830
	F18DBX/835/4P/EOL	3500	DULUX D/E 18W/835	-	Lynx DE 18W/835
	F18DBX/840/4P/EOL	4000	DULUX D/E 18W/840	PL-C 18W/840/4P	Lynx DE 18W/840
26W	F26DBX/827/4P/EOL	2700	DULUX D/E 26W/827	PL-C 26W/827/4P	Lynx DE 26W/827
	F26DBX/830/4P/EOL	3000	DULUX D/E 26W/830	PL-C 26W/830/4P	Lynx DE 26W/830
	F26DBX/835/4P/EOL	3500	DULUX D/E 26W/835	PL-C 26W/835/4P	Lynx DE 26W/835
	F26DBX/840/4P/EOL	4000	DULUX D/E 26W/840	PL-C 26W/840/4P	Lynx DE 26W/840
	F26DBX/865/4P/EOL	6500	DULUX D/E 26W/865	-	Lynx DE 26W/860
Biax™T 2pin			Dulux T Plus	Master PL-T	Lynx-T
13W	F13TBX/827/A/2P	2700	-	PL-T 13W/827/2P	-
	F13TBX/830/A/2P	3000	DULUX T 13W/830	PL-T 13W/830/2P	-
	F13TBX/840/A/2P	4000	DULUX T 13W/840	PL-T 13W/840/2P	-
18W	F18TBX/827/A/2P	2700	DULUX T 18W/827	PL-T 18W/827/2P	-
	F18TBX/830/A/2P	3000	DULUX T 18W/830	PL-T 18W/830/2P	Lynx T 18W/830
	F18TBX/840/A/2P	4000	DULUX T 18W/840	PL-T 18W/840/2P	Lynx T 18W/840
26W	F26TBX/827/A/2P	2700	DULUX T 26W/827	PL-T 26W/827/2P	-
	F26TBX/830/A/2P	3000	DULUX T 26W/830	PL-T 26W/830/2P	Lynx T 26W/830
	F26TBX/840/A/2P	4000	DULUX T 26W/840	PL-T 26W/840/2P	Lynx T 26W/840
Biax™T/E 4pin			Dulux T/E Plus	Master PL-T 4pin	Lynx- TE
13W	F13TBX/827/A/4P/EOL	2700	DULUX T/E 13W/827	PL-T 13W/827/4P	-
	F13TBX/830/A/4P/EOL	3000	DULUX T/E 13W/830	PL-T 13W/830/4P	-
	F13TBX/835/A/4P/EOL	3500	-	-	-
	F13TBX/840/A/4P/EOL	4000	DULUX T/E 13W/840	PL-T 13W/840/4P	-
18W	F18TBX/827/A/4P/EOL	2700	DULUX T/E 18W/827	PL-T 18W/827/4P	-
	F18TBX/830/A/4P/EOL	3000	DULUX T/E 18W/830	PL-T 18W/830/4P	Lynx TE 18W/830
	F18TBX/835/A/4P/EOL	3500	-	-	-
	F18TBX/840/A/4P/EOL	4000	DULUX T/E 18W/840	PL-T 18W/840/4P	Lynx TE 18W/840
26W	F26TBX/827/A/4P/EOL	2700	DULUX T/E 26W/827	PL-T 26W/827/4P	-
	F26TBX/830/A/4P/EOL	3000	DULUX T/E 26W/830	PL-T 26W/830/4P	Lynx TE 26W/830
	F26TBX/835/A/4P/EOL	3500	-	-	-
	F26TBX/840/A/4P/EOL	4000	DULUX T/E 26W/840	PL-T 26W/840/4P	Lynx TE 26W/840
32W	F32TBX/827/A/4P/EOL	2700	DULUX T/E 32W/827	PL-T 32W/827/4P	-
	F32TBX/830/A/4P/EOL	3000	DULUX T/E 32W/830	PL-T 32W/830/4P	Lynx TE 32W/830
	F32TBX/835/A/4P/EOL	3500	-	-	-
	F32TBX/840/A/4P/EOL	4000	DULUX T/E 32W/840	PL-T 32W/840/4P	Lynx TE 32W/840
42W	F42TBX/827/A/4P/EOL	2700	DULUX T/E 42W/827	PL-T 42W/827/4P	-
	F42TBX/830/A/4P/EOL	3000	DULUX T/E 42W/830	PL-T 42W/830/4P	Lynx TE 42W/830
	F42TBX/841/A/4P/EOL	3500	-	-	-
	F42TBX/835/A/4P/EOL	4000	DULUX T/E 42W/840	PL-T 42W/830/4P	Lynx TE 42W/840

Compact Fluorescent Lamps Non-Integrated

GE			OSRAM	PHILIPS	Havells Sylvania
	Biax™D/E 4pin	Colour temperature	Dulux-DE	Master PL-C	Lynx-DE
10W	F10DBX/827/4P/EOL	2700	DULUX D/E 10W/827	PL-C 10W/827/4P	Lynx DE 10W/827
	F10DBX/830/4P/EOL	3000	DULUX D/E 10W/830	PL-C 10W/830/4P	Lynx DE 10W/830
	F10DBX/840/4P/EOL	4000	DULUX D/E 10W/840	PL-C 10W/840/4P	Lynx DE 10W/840
13W	F13DBX/827/4P/EOL	2700	DULUX D/E 13W/827	PL-C 13W/827/4P	Lynx DE 13W/827
	F13DBX/830/4P/EOL	3000	DULUX D/E 13W/830	PL-C 13W/830/4P	Lynx DE 13W/830
	F13DBX/840/4P/EOL	4000	-	PL-C 13W/840/4P	Lynx DE 13W/840
18W	F18DBX/827/4P/EOL	2700	DULUX D/E 18W/827	PL-C 18W/827/4P	Lynx DE 18W/827
	F18DBX/830/4P/EOL	3000	DULUX D/E 18W/830	PL-C 18W/830/4P	Lynx DE 18W/830
	F18DBX/840/4P/EOL	4000	-	-	Lynx DE 18W/840
26W	F26DBX/827/4P/EOL	2700	DULUX D/E 26W/827	PL-C 26W/827/4P	Lynx DE 26W/827
	F26DBX/830/4P/EOL	3000	DULUX D/E 26W/830	PL-C 26W/830/4P	Lynx DE 26W/830
	F26DBX/840/4P/EOL	4000	DULUX D/E 26W/840	PL-C 26W/840/4P	Lynx DE 26W/840
	F26DBX/865/4P/EOL	6500	DULUX D/E 26W/865	-	Lynx DE 26W/860
Biax™T 2pin			Dulux T Plus	Master PL-T	Lynx-T
13W	F13TBX/827/A/2P	2700	-	PL-T 13W/827/2P	-
	F13TBX/830/A/2P	3000	DULUX T 13W/830	PL-T 13W/830/2P	-
	F13TBX/840/A/2P	4000	DULUX T 13W/840	PL-T 13W/840/2P	-
18W	F18TBX/827/A/2P	2700	DULUX T 18W/827	PL-T 18W/827/2P	-
	F18TBX/830/A/2P	3000	DULUX T 18W/830	PL-T 18W/830/2P	Lynx T 18W/830
	F18TBX/840/A/2P	4000	DULUX T 18W/840	PL-T 18W/840/2P	Lynx T 18W/840
26W	F26TBX/827/A/2P	2700	DULUX T 26W/827	PL-T 26W/827/2P	-
	F26TBX/830/A/2P	3000	DULUX T 26W/830	PL-T 26W/830/2P	Lynx T 26W/830
	F26TBX/840/A/2P	4000	DULUX T 26W/840	PL-T 26W/840/2P	Lynx T 26W/840
Biax™T/E 4pin			Dulux T/E Plus	Master PL-T 4pin	Lynx- TE
13W	F13TBX/827/A/4P/EOL	2700	DULUX T/E 13W/827	PL-T 13W/827/4P	-
	F13TBX/830/A/4P/EOL	3000	DULUX T/E 13W/830	PL-T 13W/830/4P	-
	F13TBX/835/A/4P/EOL	3500	-	-	-
18W	F18TBX/840/A/4P/EOL	4000	DULUX T/E 13W/840	PL-T 13W/840/4P	-
	F18TBX/827/A/4P/EOL	2700	DULUX T/E 18W/827	PL-T 18W/827/4P	-
	F18TBX/830/A/4P/EOL	3000	DULUX T/E 18W/830	PL-T 18W/830/4P	Lynx TE 18W/830
26W	F18TBX/835/A/4P/EOL	3500	-	-	-
	F18TBX/840/A/4P/EOL	4000	DULUX T/E 18W/840	PL-T 18W/840/4P	Lynx TE 18W/840
	F26TBX/827/A/4P/EOL	2700	DULUX T/E 26W/827	PL-T 26W/827/4P	-
32W	F26TBX/830/A/4P/EOL	3000	DULUX T/E 26W/830	PL-T 26W/830/4P	Lynx TE 26W/830
	F26TBX/835/A/4P/EOL	3500	-	-	-
	F26TBX/840/A/4P/EOL	4000	DULUX T/E 26W/840	PL-T 26W/840/4P	Lynx TE 26W/840
42W	F32TBX/827/A/4P/EOL	2700	DULUX T/E 32W/827	PL-T 32W/827/4P	-
	F32TBX/830/A/4P/EOL	3000	DULUX T/E 32W/830	PL-T 32W/830/4P	Lynx TE 32W/830
	F32TBX/835/A/4P/EOL	3500	-	-	-
42W	F42TBX/840/A/4P/EOL	4000	DULUX T/E 32W/840	PL-T 32W/840/4P	Lynx TE 32W/840
	F42TBX/827/A/4P/EOL	2700	DULUX T/E 42W/827	PL-T 42W/827/4P	-
	F42TBX/830/A/4P/EOL	3000	DULUX T/E 42W/830	PL-T 42W/830/4P	Lynx TE 42W/830
	F42TBX/841/A/4P/EOL	3500	-	-	-
	F42TBX/835/A/4P/EOL	4000	DULUX T/E 42W/840	PL-T 42W/830/4P	Lynx TE 42W/840

Brand cross reference

GE			OSRAM	PHILIPS	Havells Sylvania
	Biax™Q/E 4pin	Colour temperature	Dulux T/E	PL-T	Lynx- TE
57W	F57QBX/827/A/4P/EOL	2700	-	PL-T 57W/827/4P	-
	F57QBX/830/A/4P/EOL	3000	-	PL-T 57W/830/4P	-
	F57QBX/835/A/4P/EOL	3500	-	-	-
	F57QBX/840/A/4P/EOL	4000	-	PL-T 57W/840/4P	-
70W	F70QBX/830/A/4P/EOL	3000	-	-	-
	F70QBX/835/A/4P/EOL	3500	-	-	-
	F70QBX/840/A/4P/EOL	4000	-	-	-
	Biax™L 4pin		Dulux-L	PL-L	Lynx L & Lynx-LE
18W	F18BX/827	2700	DULUX L 18W/827	-	Lynx L 18W/827
	F18BX/830	3000	DULUX L 18W/830	PL-L 18W/830/4P	Lynx L 18W/830
	F18BX/835	3500	DULUX L 18W/835	PL-L 18W/835/4P	-
	F18BX/840	4000	DULUX L 18W/840	PL-L 18W/840/4P	Lynx L 18W/840
24W	F24BX/827	2700	DULUX L 24W/827	-	Lynx L 24W/827
	F24BX/830	3000	DULUX L 24W/830	PL-L 24W/830/4P	Lynx L 24W/830
	F24BX/835	3500	DULUX L 24W/835	PL-L 24W/835/4P	-
	F24BX/840	4000	DULUX L 24W/840	PL-L 24W/840/4P	Lynx L 24W/840
34W	F34BX/830	3000	-	-	-
	F34BX/835	3500	-	-	-
	F34BX/840	4000	-	-	-
36W	F36BX/827	2700	DULUX L 36W/827	-	Lynx L 36W/827
	F36BX/830	3000	DULUX L 36W/830	PL-L 36W/830/4P	Lynx L 36W/830
	F36BX/835	3500	DULUX L 36W/835	-	-
	F36BX/840	4000	DULUX L 36W/840	PL-L 36W/840/4P	Lynx L 36W/840
	F36BX/865	6500	DULUX L 36W/865	PL-L 36W/865/4P	Lynx L 36W/865
40W	F40BX/830	3000	DULUX L 40W/830	PL-L 40W/830/4P	Lynx LE 40W/830
	F40BX/835	3500	DULUX L 40W/835	PL-L 40W/835/4P	Lynx LE 40W/835
	F40BX/840	4000	DULUX L 40W/840	PL-L 40W/840/4P	Lynx LE 40W/840
55W	F55BX/830	3000	DULUX L 55W/830	PL-L 55W/830/4P	Lynx LE 55W/830
	F55BX/835	3500	DULUX L 55W/835	PL-L 55W/835/4P	Lynx LE 55W/835
	F55BX/840	4000	DULUX L 55W/840	PL-L 55W/840/4P	Lynx LE 55W/840
	F55BX/854	6500	DULUX L 55W/865	PL-L 55W/865/4P	Lynx LE 55W/865
	Biax™ 2D 2pin			PL-Q 2pin	Lynx-Q (GR8 base) 2 pin
16W	F162D/T4/827/2P GE HB 1/10 WM	2700	CFL Square 16W/827	PLQ 16W/827/2P	Lynx-Q 16W/827/2P
	F162D/T4/835/2P GE HB 1/10 WM	3500	CFL Square 16W/835	PLQ 16W/835/2P	Lynx-Q 16W/835/2P
	F162D/T4/860/2P GE HB 1/10 WM	6000	-	-	-
28W	F282D/T5/827/2P GE HB 1/10 WM	2700	CFL Square 28W/827	-	-
	Biax™ 2D 4pin			PL-Q 4pin	Lynx-QE 4 pin
10W	OT F10W/2D/827/4P GE BL 1/20	2700	-	-	-
	OT F10W/2D/835/4P GE BL 1/20	3500	-	-	-
16W	F162D/T4/827/4P GE HB 1/10 WM	2700	CFL Square 16W/827	PLQ 16W/827/4P	Lynx-QE 16W/827/4P
	F162D/T4/835/4P GE HB 1/10 WM	3500	CFL Square 16W/835	PLQ 16W/835/4P	Lynx-QE 16W/835/4P
21W	F212D/T4/827/4P GE HB 1/10 WM	2700	-	-	-
	F212D/T4/835/4P GE HB 1/10 WM	3500	-	-	-
	F212D/T4/860/4P GE HB 1/10 WM	6000	-	-	-
28W	F282D/T5/827/4P GE HB 1/10 WM	2700	CFL Square 28W/827	PLQ 28W/827/4P	Lynx-QE 28W/827/4P
	F282D/T5/830/4P GE HB1/10 WM	3000	-	PLQ 28W/830/4P	-
	F282D/T5/835/4P GE HB 1/10 WM	3500	CFL Square 28W/835	PLQ 28W/835/4P	Lynx-QE 28W/835/4P
	F282D/T5/840/4P GE HB 1/10 WM	4000	-	PLQ 28W/840/4P	Lynx-QE 28W/840/4P
38W	F382D/T5/827/4P GE HB 1/10 WM	2700	CFL Square 38W/827	PLQ 38W/827/4P	Lynx-QE 38W/827/4P
	F382D/T5/835/4P GE HB 1/10 WM	3500	-	PLQ 38W/835/4P	Lynx-QE 38W/835/4P
	F382D/T5/860/4P LEG HB 1/10 WM	6000	-	-	-
55W	F552D/T5/827/4P A LEG HB 1/10	2700	-	-	-
	F552D/T5/830/4P A/T LEG HB 1/10	3000	-	-	-
	F552D/T5/835/4P A LEG HB 1/10	3500	-	-	-